




产品型号 Model	ISSR-10DA	ISSR-15DA	ISSR-25DA	ISSR-40DA
负载电流 Load Current	10A	15A	25A	40A
负载电压 Load Voltage	24-480VAC	24-480VAC	24-480VAC	24-480VAC
控制电压 Control Voltage	3-48VDC	3-48VDC	3-48VDC	3-48VDC
控制电流 Control Current	3-20mADC	3-20mADC	3-20mADC	3-20mADC
通态压降 On Voltage	≤ 1.5VAC	≤ 1.5VAC	≤ 1.5VAC	≤ 1.5VAC
断态漏电流 Off-state Leakage Current	≤ 4mA	≤ 4mA	≤ 4mA	≤ 4mA
通断时间 Time Off	≤ 10ms	≤ 10ms	≤ 10ms	≤ 10ms
介质耐压 Dielectric Strength	2500VAC	2500VAC	2500VAC	2500VAC
绝缘电阻 Insulation Resistance	100MΩ/500VDC	100MΩ/500VDC	100MΩ/500VDC	100MΩ/500VDC
环境温度 Ambient Temperature	-25~+75℃	-25~+75℃	-25~+75℃	-25~+75℃
安置方式 Mounting Methods	M4 螺栓固定	M4 螺栓固定	M4 螺栓固定	M4 螺栓固定
工作指示 The work instructions	双 LED: (绿色: 工作; 红色: 故障)	双 LED: (绿色: 工作; 红色: 故障)	双 LED: (绿色: 工作; 红色: 故障)	双 LED: (绿色: 工作; 红色: 故障)
重量 Weight	50g	50g	50g	50g

外形尺寸  
Overall dimensions

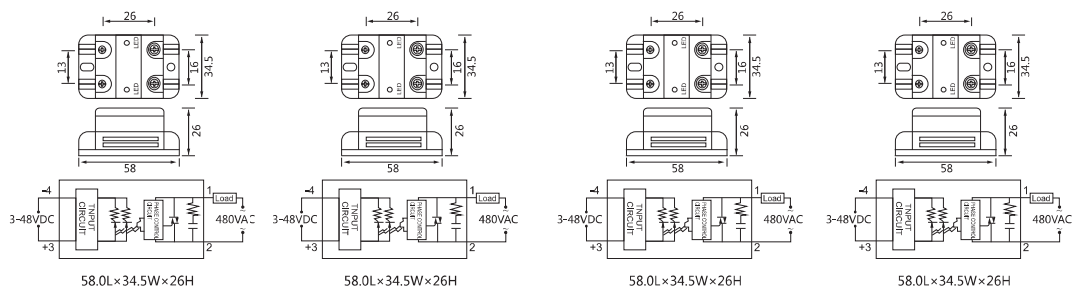

说明: 1、负载 10A, 必须装散热器, 40A 以上加风扇强冷或水冷。  
2、使用感性负载时, 请务必在输出端并接一压敏电阻, 取值为负载电压的 1.6-1.9 倍。

Instruction: 1、load current 10A, should install radiator, upwards 40A should add fan for force cooling or water cooling.  
2、When using Inductive load, please add a varistor at the output side, the value is 1.6-1.9 multiple of load voltage.